




## Mobile Truck Sperre



Die MVB 3X™ verhindert, dass rammende Fahrzeuge in eingeschränkte Bereiche einfahren.

Patentierte Technologie überträgt die Dynamik des Fahrzeugs auf den Boden.

Die dritte und neueste Generation von MVB, Technologie auf der Grundlage von 20 Jahren Erfahrung im Service auf der ganzen Welt.


Die erste getestete und zertifizierte, leichte modulare Fahrzeugbarriere, die schwere Lkw bis 7,5 Tonnen stoppt.





### Technische Details MVB 3X

Breite:	53cm
Höhe:	82cm
Länge:	118cm
Gesamtgewicht:	24kg
Montageteam:	1 Personen
Montageart:	Oberflächenmontage
Optionen:	Spikes, Beleuchtung, Schilder

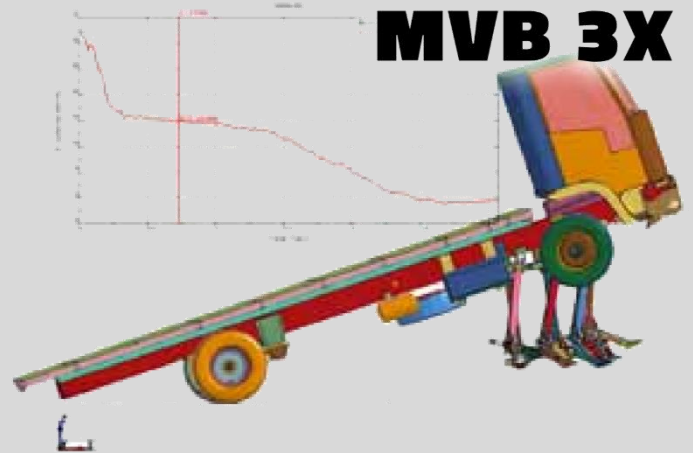

RAMMING VEHICLES (TORQUE MOMENT)	8517										8506									
	MELBOURNE	LONDON	STOCKHOLM	CHICAGO	BARCELONA	JERUSALEM	NEW YORK	NICE	BERLIN	COLUMBUS OHIO	MELBOURNE	LONDON	STOCKHOLM	CHICAGO	BARCELONA	JERUSALEM	NEW YORK	NICE	BERLIN	COLUMBUS OHIO
MVB/ SMVB	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
CarMen	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
FMB	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
MVB-II	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
MVB 3X	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
SAMSON	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
TRUCKMEN SAMSON	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
HERCULES	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
PYRAMID	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
RMB	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓



	HERCULES	SAMSON	MVB3X	MVB-II	MVB SMVB	FMB	CarMen	PYRAMID	RMB	
<b>CAN STOP</b>										
<b>PIVOT</b>	SPECIAL					NO	SPECIAL	NO	SPECIAL	
<b>DIMENSIONS</b> (Sample unit)	<b>Length</b>	~180 cm ~5.9 ft	~150 cm ~4.92 ft	~118 cm ~3.87 ft	~110 cm ~3.61 ft	~100 cm ~3.3 ft	~250 cm ~8.2 ft	~255 cm ~8.4 ft	~300 cm ~9.85 ft	
	<b>Width</b>	~110 cm ~3.61 ft	~65 cm ~2.13 ft	~53 cm ~1.74 ft	~64 cm ~2.1 ft	~70 cm ~2.3 ft	~64 cm ~2.1 ft	~100 cm ~3.3 ft	~75 cm ~2.46 ft	
	<b>Height</b>	~125 cm ~4.1 ft	~108 cm ~3.54 ft	~82 cm ~2.7 ft	~88.5 cm ~2.94 ft	~70 cm ~2.3 ft	~100 cm ~3.3 ft	~120 cm ~3.94 ft	~100 cm ~3.3 ft	~200 cm ~6.6 ft
	<b>Weight</b>	~175kg ~385.88 lbs	~65 kg ~143.3 lbs	~24 kg ~52.9 lbs	~27 kg ~59.5 lbs	~33 kg ~72.77 lbs	~150kg ~330.7 lbs	~350kg ~771.8 lbs	~700 kg ~1,544 lbs	
<b>DEPLOYMENT</b>										
<b>CERTIFIED</b> by a commercial standards										

#### Road width protected by using X barriers

	3 Units	4 Units	5 Units	6 Units	7 Units	8 Units	9 Units
<b>Length</b>	~2.95 m ~9.68 ft	~1.95 m ~6.39 ft	~1.59 m ~5.22 ft	-	-	-	-
<b>Width</b>	~4.05 m ~13.3 ft	~2.60 m ~8.53 ft	~2.12 m ~6.95 ft	~1.9 m ~6.23 ft	~1.8 m ~5.9 ft	~2.8 m ~9.18 ft	~1.38 m ~4.53 ft
<b>Height</b>	~5.15 m ~16.9 ft	~3.25 m ~10.66 ft	~2.65 m ~8.69 ft	~2.56 m ~8.4 ft	~2.4 m ~7.87 ft	~3.5 m ~11.48 ft	~2.66 m ~8.73 ft
<b>Weight</b>	~6.25 m ~20.5 ft	~3.90 m ~12.79 ft	~3.18 m ~10.43 ft	~3.2 m ~10.5 ft	~3 m ~9.84 ft	~4.2 m ~13.78 ft	~6 m ~19.67 ft
	~7.35 m ~24.77 ft	~4.55 m ~14.93 ft	~3.71 m ~12.17 ft	~3.85 m ~12.63 ft	~3.6 m ~11.81 ft	~4.9 m ~16.08 ft	~3.96 m ~13.0 ft
	~8.45 m ~27.72 ft	~5.20 m ~17.06 ft	~4.24 m ~13.91 ft	~4.5 m ~14.76 ft	~4.2 m ~13.78 ft	~5.6 m ~18.37 ft	~8 m ~26.25 ft
	~9.55 m ~31.33 ft	~5.85 m ~19.19 ft	~4.77 m ~15.65 ft	~5.12 m ~16.8 ft	~4.8 m ~15.75 ft	~5.3 m ~17.39 ft	~5.26 m ~17.26 ft

**KEY:** A Up To 250 kg [551 lbs.] B Up To 2,500 kg [5,512 lbs.] C Up To 3,500 kg [7,717 lbs.] D Up To 7,500 kg [16,537 lbs.] E Up To 40,000 kg [88,200 lbs.]

\* At slow speed only